


TRt25

TRt SERIES SPECIFICATIONS	Units	TRt25
Rotary Torque (max)	ft-lbs kN-m	25,000 35
Kelly Winch Line Pull	lbs kN	12,000 53
Hole Diameter (max, recommended)	in mm	48 1,200
Drill Speed Range	RPM	0-60/100
Crowd Stroke	in mm	72 96 125 140 1,800 2,400 3,200 3,600
Hole Depth (max)	ft m	80 24
Standard Mast - Drill Height Range	ft m	12-18 3.7-5.5
Stand Slide Scope	in mm	24 610
Kelly Elements - Square (max)	qty	8
Kelly Elements - RLK (max)	qty	5

Specifications shown are based on standard configuration. Performance, capacities, and achievable depths may vary depending on ground conditions, tooling, operation, and machine configuration. Deeper depths and additional capabilities are available with optional upgrades. Excavator modifications may be required. Contact your Bay Shore Systems representative for details.

The TRt25 puts **25,000 ft-lb of torque** on a truck-mounted rig built for work that keeps moving. With **holes up to 48 inches in diameter** and **up to 80 feet deep**, it gives crews real drilling capacity without bringing more rig than the job calls for.

A good fit for utility, light foundation and restricted-overhead work where getting to the next hole matters too.

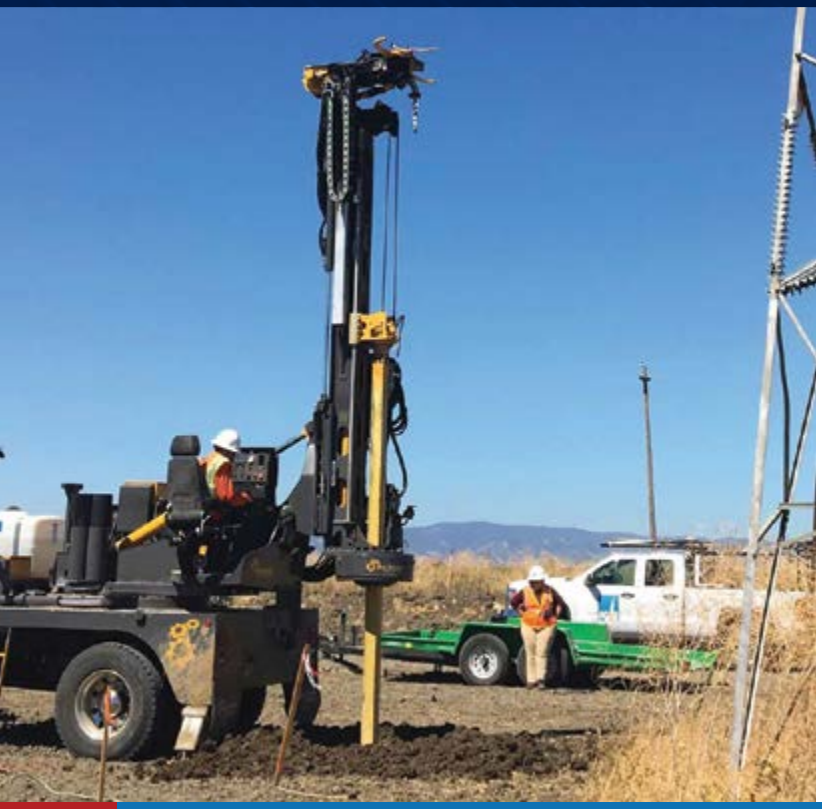

BUILT TO MOVE.
BUILT TO DRILL.

- **Rotary:** Bay Shore-designed and manufactured rotary gearbox with up to 25,000 ft-lb of torque.
- **Winch:** 12,000-lb Kelly winch matched to the TRt25's drilling depth and application.
- **Kelly Bars:** Round-locking or square friction Kelly bars configured around depth, mast height and ground conditions.
- **Mast:** Standard drill height range of 12–18 ft, with short- and extended-mast configurations available.
- **Truck:** Available on suitable truck platforms, including configurations built around fleet, axle and jobsite requirements.